


LIGHT CONTROL - STAIRCASE LIGHTING

FUNCTIONS



MODELS

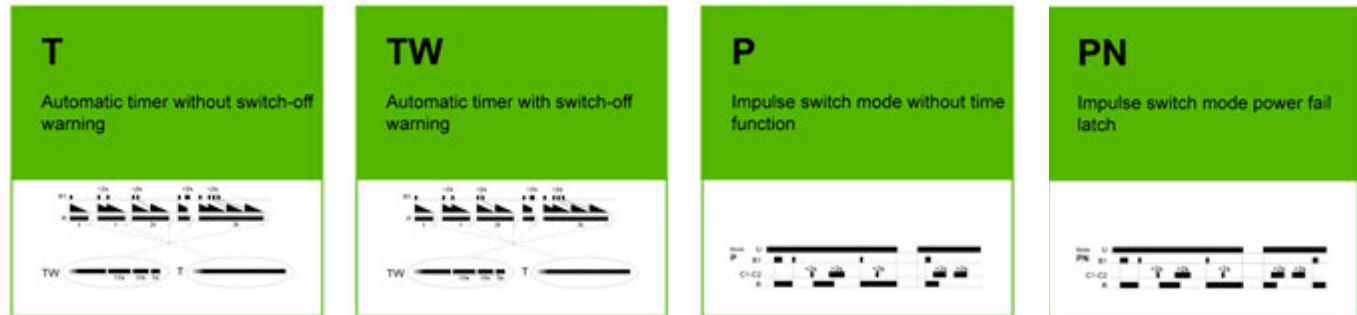


Model	E1ZTP	E1ZTPO	E1ZTPNC
Functions	TW, P, 1, 0	T, P, 1, 0	T, TW, P, PN, 1, 0
Voltage	230VAC	230VAC	230VAC
Contacts	1 C/O	1 C/O	1 C/O
Contact Rating	16A (80A Inrush - 20ms)	16A (80A Inrush - 20ms)	16A (80A Inrush - 20ms)
Time Ranges	0.5 - 12 min	0.5 - 12 min	0.5, 2, 4, 6, 8, 10, 12 min
Pushbutton Glowlamp Load	100mA	100mA	100mA
Low Switching Noise	Yes	Yes	Yes
Additional Control Input	No	No	Yes
Size	17.5mm wide	17.5mm wide	17.5mm wide

Please Note: Function 1 is permanently ON and Function 0 is permanently OFF

LIGHT CONTROL - STAIRCASE LIGHTING

FUNCTIONS

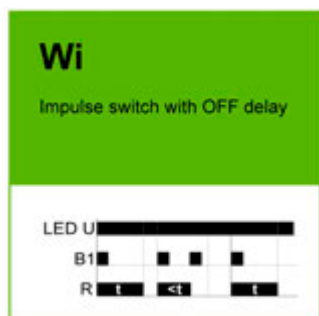

MODELS




Model	E1ZWI	E1K	E3K
Functions	Impulse switch with OFF Delay	Coupling Relay	Coupling Relay
Voltage	230VAC	24-230VAC/DC	24-230VAC/DC
Contacts	1 C/O	1 C/O	2 C/O
Contact Rating	16A (80A Inrush - 20ms)	2000VA (8A - 250VAC)	2000VA (8A - 250VAC)
Time Ranges	6,10,20,30,40,50,60min	N/A	N/A
Pushbutton Glowlamp Load	N/A	N/A	N/A
Low Switching Noise	Yes	Yes	Yes
Additional Control Input	N/A	No	Yes
Size	17.5mm wide	17.5mm wide	17.5mm wide

LIGHT CONTROL - EMERGENCY LIGHTING

FUNCTIONS



E1ZNT CONNECTION DIAGRAMS

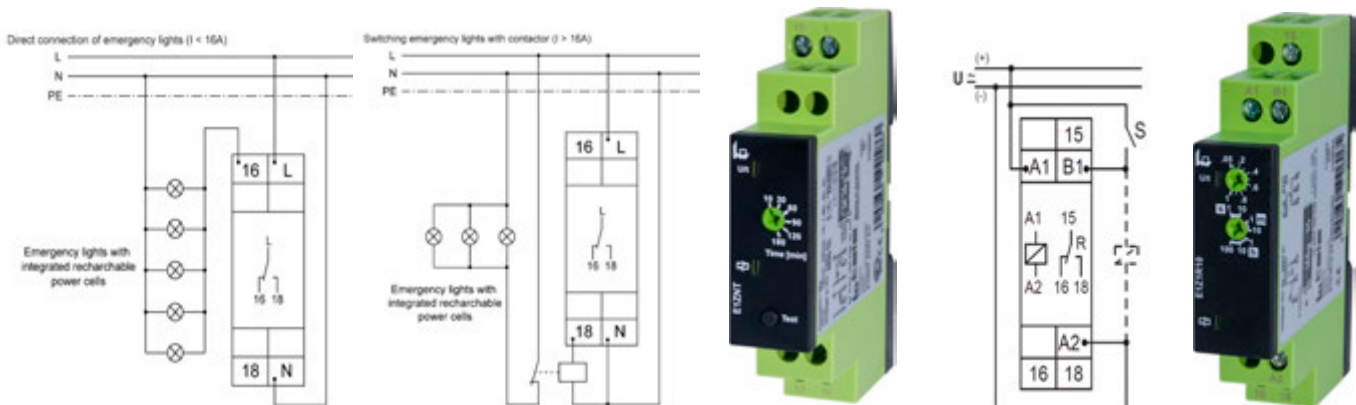

Model	E1ZNT	E1Z1R10
Functions	Emergency Light Testing (Ws)	External Input Emergency Light Testing - OFF Delay (R)
Features	Integrated Test Push Button	External Input
Start Test / Activate	Press Push Button < 2 sec	External Input
Stop Test / Deactivate	Press Push Button > 2 sec	External Input
Voltage	230VAC	24-240VAC/DC
Contacts	1 C/O Timed	1 C/O Timed
Contact Rating (Direct - L&16)	16A (80A Inrush - 20ms)	
Contact Rating (Contactor - L&18)	1250VA (5A - 250VAC)	2000VA (8A - 250VAC)
Indication	Green/Yellow LED	Green/Yellow LED
Time Settings	10, 30, 60, 90, 120, 180 min	50 msec - 100 hours
Size	17.5mm wide	17.5mm wide