

FLEXIBLE CONDUIT

FLEXIBLE CONDUIT - PA6-LL (IP68)



Flexible corrugated conduit made from high quality polyamide material. Temperature range of -25°C to +120°C. Air and liquid tight, resistant against acids and alkalis, highly resistant to solvents. UL & CSA Certified. Flame retardant - UV resistant - Halogen free.



Product Code	Size	O/D	Colour	Flexa code	Supply lengths
PA6-LL-M10	M10	10.0mm	black	0267.202.006	25 / 50m
PA6-LL-M12	M12	13.0 mm	black	0267.202.010	25 / 50m
PA6-LL-M16	M16	15.8 mm	black	0267.202.012	25 / 50m
PA6-LL-M20	M20	21.2 mm	black	0267.202.016	25 / 50m
PA6-LL-M25	M25	28.5 mm	black	0267.232.023	25 / 50m
PA6-LL-M32	M32	34.5 mm	black	0267.232.029	25m
PA6-LL-M40	M40	42.5 mm	black	0267.232.036	25m
PA6-LL-M50	M50	54.5 mm	black	0267.232.048	25m

FLEXIBLE CONDUIT - PA6-L (IP68) - HIGH IMPACT / HEAVY DUTY



Flexible corrugated conduit made from high impact polyamide material. Temperature range of -25°C to +120°C. Air & liquid tight, resistant against acids & alkalis, highly resistant to solvents. UL & CSA certified. Flame retardant - UV resistant - Halogen free.



Product Code	Size	O/D	Colour	Flexa code	Supply lengths
PA6-L-M12	M12	13.0mm	black	0261.202.010	25 / 50m
PA6-L-M16	M16	15.8 mm	black	0261.202.012	25 / 50m
PA6-L-M20	M20	21.2 mm	black	0261.202.016	25 / 50m
PA6-L-M25	M25	28.5 mm	black	0261.232.023	25 / 50m
PA6-L-M32	M32	34.5 mm	black	0261.232.029	25 m
PA6-L-M40	M40	42.5 mm	black	0261.232.036	25 m
PA6-L-M50	M50	54.5 mm	black	0261.232.048	25 m

FLEXIBLE CONDUIT - PA6 & PA6-S (IP68/IP69K) - HIGH IMPACT / HEAVY DUTY / HIGH TEMP



Flexible corrugated conduit made from high impact polyamide material. Temperature range of -40°C to +120°C (^+150°C). Air & liquid tight, resistant against acids & alkalis, highly resistant to solvents. UL & CSA certified. Flame retardant - UV resistant - Halogen free.



Product Code	Size	O/D	Colour	Flexa code	Supply lengths
PA6-M20	M20	21.2 mm	black	0233.202.016	25 / 50m
PA6-M25	M25	28.5 mm	black	0233.202.013	25 / 50m
PA6-M32	M32	34.5 mm	black	0233.202.029	25 m
PA6-M40	M40	42.5 mm	black	0233.202.036	25 m
PA6-M50	M50	54.5 mm	black	0233.202.048	25 m
PA6-S-M20	M20	21.2 mm	black	0261.202.016	25 / 50m
PA6-S-M25	M25	28.5 mm	black	0261.232.023	25 / 50m



FLEXIBLE CONDUIT

FLEXIBLE CONDUIT - PA6-D (IP68/IP69K) - HIGH IMPACT / EXTRA THICK WALL



Flexible corrugated conduit made from high quality polyamide material. Temperature range of -40°C to +120°C (^+150°C). Air and liquid tight, resistant against acids and alkalis, highly resistant to solvents. UL & CSA Certified. Flame retardant - UV resistant - Halogen free.



Product Code	Size	O/D	Colour	Flexa code	Supply lengths
PA6-D-M20	M20	21.2 mm	black	0237.202.016	25 / 50m
PA6-D-M25	M25	28.5 mm	black	0237.202.023	25 / 50m

FLEXIBLE CONDUIT - PA6-HT (IP68/IP69K) - HIGH IMPACT / HIGH TEMP



Flexible corrugated conduit made from high quality polyamide material. Temperature range of -25°C to +150°C (^+170°C). Air and liquid tight, resistant against acids and alkalis, highly resistant to solvents. UL & CSA Certified. Flame retarding - UV resistant - Halogen free.



Product Code	Size	O/D	Colour	Flexa code	Supply lengths
PA6-HT-M20	M20	21.2 mm	black	0254.202.016	25 / 50m
PA6-HT-M25	M25	28.5 mm	black	0254.202.023	25 / 50m

FLEXIBLE CONDUIT - PA6-MULTI (IP68/IP69K) - HIGH IMPACT / LARGE SIZE



Flexible corrugated conduit made from high quality polyamide material. Temperature range of -40°C to +120°C (^+150°C). Air and liquid tight, resistant against acids and alkalis, highly resistant to solvents. UL & CSA Certified. Flame retardant - UV resistant - Halogen free.



Product Code	Size	O/D	Colour	Flexa code	Supply lengths
PA6-MULTI-80	M80	79.2 mm	black	0206.202.070	10m

STRAIGHT ADAPTORS (IP66)



Straight high quality polyamide adaptor with screw connection and patented quick-fit conduit connection. Temperature range of -30°C to +100°C. Air & liquid tight, highly resistant against acids & solvents, resistant to oil and benzene. Impact resistant - UV resistant - Halogen free.

Product Code	Size	Colour	Flexa Code	Packet Size
RQG1-M10	M10	black	5020.055.210	50
RQG1-M12	M12	black	5020.055.212	50
RQG1-M16	M16	black	5020.055.216	50
RQG1-M20	M20	black	5020.055.220	50
RQG1-M25	M25	black	5020.055.225	25
RQG1-M32	M32	black	5020.055.232	25
RQG1-M40	M40	black	5020.055.240	25
RQG1-M50	M50	black	5020.055.250	10
RQG1-M50/63	M50/M63 Thread	black	5020.055.263	10

FLEXIBLE CONDUIT

STRAIGHT ADAPTORS (IP68/IP69K)



Straight high quality polyamide adaptor with screw connection and patented quick-fit conduit connection. Temperature range of -40°C to $+120^{\circ}\text{C}$. Air & liquid tight, highly resistant against acids & solvents, resistant to oil and benzene. Impact resistant - UV resistant - Halogen free.

Product Code	Size	Colour	Flexa Code	Packet Size
RQG-M20	M20	black	5020.037.220	50
RQG-M25	M25	black	5020.037.225	25

STRAIGHT ADAPTORS WITH SPECIAL THREADS (IP66)



Straight high quality polyamide adaptor with screw connection and patented quick-fit conduit connection. Temperature range of -30°C to $+100^{\circ}\text{C}$. Air & liquid tight, highly resistant against acids & solvents, resistant to oil and benzene. Impact resistant - UV resistant - Halogen free.

Product Code	Size	Colour	Flexa Code	Packet Size
RQG1-M12/PG9	M12/PG9 Thread	black	5020.049.209	50
RQG1-M12/M16	M12/M16 Thread	black	5020.055.214	50
RQG1-M16/M20	M16/M20 Thread	black	5020.055.218	50
RQG1-M16/PG11	M20/PG11 Thread	black	5020.049.211	50
RQG1-M20/PG16	M20/PG16 Thread	black	5020.049.216	50
RQG1-M20/M25	M20/M25 Thread	black	5020.055.222	50
RQG1-M32/M40	M32/M40 Thread	black	5020.055.236	32

STRAIGHT ADAPTORS METRIC WITH LOCK NUT (IP66)



Straight high quality polyamide adaptor with screw connection and patented quick-fit conduit connection. Temperature range of -30°C to $+100^{\circ}\text{C}$. Air & liquid tight, highly resistant against acids & solvents, resistant to oil and benzene. Impact resistant - UV resistant - Halogen free.

Product Code	Size	Colour	Flexa code	Packet Size
RQG1-M16/LN	M16	black	with Lock Nut	50
RQG1-M20/LN	M20	black	with Lock Nut	50
RQG1-M25/LN	M25	black	with Lock Nut	25
RQG1-M32/LN	M32	black	with Lock Nut	25

PRESS-IN STRAIGHT ADAPTORS (IP66)



Straight high quality polyamide adaptor and patented quick-fit connection. Supplied with O-ring for installation without locknut with wall thickness of 1 to 2.5 mm. Temperature range of -30°C to $+100^{\circ}\text{C}$. Resistant against impact, acids, solvents, oil and UV. Halogen free.

Product Code	Size	Colour	Flexa code	Bore hole \varnothing	Packet Size
RQG1-S-M12	M12	black	5020.082.209	14.9 mm	50
RQG1-S-M16	M16	black	5020.082.211	18.1 mm	50
RQG1-S-M20	M20	black	5020.082.216	22.0 mm	50
RQG1-S-M25	M25	black	5020.082.221	28.1 mm	25
RQG1-S-M32	M32	black	5020.082.229	36.5 mm	25



FLEXIBLE CONDUIT

STRAIGHT ADAPTORS WITH METAL THREAD (IP68/IP69K)



Straight high quality polyamide adaptor with nickel plated brass screw thread and patented quick-fit conduit connection. Temperature range of -30°C to +100°C. Air & liquid tight, resistant against acids, solvents, oil and benzene. Impact resistant - UV resistant - Halogen free.

Product Code	Size	Colour	Flexa code	Packet Size
RQGK-M16/M20	M16 Conduit - M20 Thread	black	5107.015.220	50
RQGK-M20	M20	black	5107.021.220	50
RQGK-M25	M25	black	5107.028.225	25
RQGK-M32	M32	black	5107.034.232	25
RQGK-M32/M25	M32 Conduit - M25 Thread	black	5107.028.232	25
RQGK-M32/PG29	M32 Conduit - PG29 Thread	black	5020.074.229	50
RQGK-M40	M40	black	5107.042.240	10
RQGK-M50	M50	black	5107.054.250	10
RQGK-M63/M50	M50 Conduit - M63 Thread	black	5107.054.263	10

STRAIGHT ADAPTORS - INTERNAL THREAD (IP68/IP69K)



Straight high quality polyamide adaptor with internal screw connection and patented quick-fit conduit connection. Temperature range of -40°C to +120°C. Air & liquid tight, highly resistant against acids & solvents, resistant to oil/benzene. Impact resistant - UV resistant - Halogen free.

Product Code	Size	Colour	Flexa Code	Packet Size
RQG2-M20	M20	black	5020.078.220	50
RQG2-PG16	PG16	black	5020.081.216	50

STRAIGHT ADAPTORS - INTERNAL METAL THREAD (IP68/IP69K)



Straight high quality polyamide adaptor with internal metal screw connection and patented quick fit conduit connection. Temperature range of -40°C to +120°C. Air & liquid tight, highly resistant against acids & solvents, resistant to oil/benzene. Impact resistant - UV resistant - Halogen free.

Product Code	Size	Colour	Flexa Code	Packet Size
RQGG2-M10/M12	M10/M12 Thread	black	5108.010.212	50

STRAIGHT ADAPTORS - PIPE FIXING WITH CLAMP (IP68/IP69K) - CLAMP INCLUDED



Straight high quality polyamide adaptor for pipe fixing with clamp and patented quick fit conduit connection. Temperature range of -40°C to +120°C. Air & liquid tight, highly resistant against acids & solvents, resistant to oil/benzene. Impact resistant - UV resistant - Halogen free.

Product Code	Size	Colour	Flexa Code	Packet Size
RQGST-M20	M20	black	5604.021.220	50
RQGST-M25	M25	black	5604.028.225	25

FLEXIBLE CONDUIT

ANGLE ADAPTORS - STANDARD (IP66)



Angle high quality polyamide adaptor with screw connection and patented quick-fit conduit connection. Temperature range of -30°C to +100°C. Air & liquid tight, highly resistant against acids & solvents, resistant to oil and benzene. Impact resistant - UV resistant - Halogen free.

Product Code	Size	Colour	Flexa code	Packet size
RQW1-M10	M10	black	5020.051.210	50
RQW1-M12	M12	black	5020.051.212	50
RQW1-M16	M16	black	5020.051.218	50
RQW1-M20	M20	black	5020.051.222	50
RQW1-M25	M25	black	5020.051.228	25
RQW1-M32	M32	black	5020.051.234	10
RQW1-M40	M40	black	5020.051.242	10
RQW1-M50	M50	black	5020.051.254	10

ANGLE ADAPTORS - 45° & 90° (IP66)



Angle high quality polyamide adaptor with screw connection and patented quick-fit conduit connection. Temperature range of -30°C to +100°C. Air & liquid tight, highly resistant against acids & solvents, resistant to oil and benzene. Impact resistant - UV resistant - Halogen free.

Product Code	Size	Colour/Angle	Flexa code	Packet size
RQB1-45-M20	M20	black/45°	5101.021.220	50
RQB1-45-M25	M25	black/45°	5101.028.225	25
RQB1-45-M32	M32	black/45°	5101.034.232	10
RQB1-90-M20	M20	black/90°	5104.021.220	50
RQB1-90-M25	M25	black/90°	5104.028.225	25
RQB1-90-M32	M32	black/90°	5104.034.232	10

ANGLE ADAPTORS - 45° & 90° WITH METAL THREAD (IP68)



Angle high quality polyamide adaptor with nickel plated brass and patented quick-fit conduit connection. Temperature range of -30°C to +100°C. Air & liquid tight, highly resistant against acids & solvents, resistant to oil and benzene. Impact resistant - UV resistant - Halogen free.

Product Code	Size	Colour/Angle	Flexa code	Packet size
RQBK-45-M20	M20	black/45°	5102.021.220	50
RQBK-45-M25	M25	black/45°	5102.028.225	25
RQBK-90-M20	M20	black/90°	5105.021.220	50
RQBK-90-M25	M25	black/90°	5105.028.225	25
RQBK90-M32/M25	M32 Thread - M25 Conduit	black/90°	5105.028.232	25



FLEXIBLE CONDUIT

CONDUIT CLAMPS WITH COVER



One piece conduit clamp with centre fixing hole and ribbed fixing for strain relief of conduit. Made from high quality polyamide material. Temperature range of -30°C to 100°C . Different sizes can be joined alongside each other. UV resistant - Halogen free.

Product Code	Conduit size	Conduit O/D	Colour	Flexa code	Packet Size
RQS-M10	M10	10.0 mm	black	5030.020.207	50
RQS-M12	M12	13.0 mm	black	5030.020.209	50
RQS-M16	M16	15.8 mm	black	5030.020.211	50
RQS-M20	M20	21.2 mm	black	5030.020.216	50
RQS-M25	M25	28.5 mm	black	5030.020.221	25
RQS-M32	M32	34.5 mm	black	5030.020.229	25
RQS-M40	M40	42.5 mm	black	5030.020.236	25
RQS-M50	M50	54.5 mm	black	5030.020.248	10

CONDUIT CLAMPS - PLAIN AND COVERS



Low cost one piece polyamide conduit clamp with centre fixing hole and ribbed fixing for strain relief of conduit. Temperature -30°C to 100°C . UV resistant - Halogen free. RQHD is the cover for RQH - supplied separately. RQHV product joins two RQH conduit clamps together.

Product Code	Conduit size	Conduit O/D	Colour	Flexa code	Packet Size
RQH-M12	M12	13.0 mm	black	5030.025.209	50
RQH-M16	M16	15.8 mm	black	5030.025.211	50
RQH-M20	M20	21.2 mm	black	5030.025.216	50
RQH-M25	M25	28.5 mm	black	5030.025.221	25
RQH-M32	M32	34.5 mm	black	5030.025.229	25
RQH-M40	M40	42.5 mm	black	5030.025.236	25
RQHD-M12	M12	Cover	black	5030.026.209	50
RQHD-M16	M16	Cover	black	5030.026.211	50
RQHD-M20	M20	Cover	black	5030.026.216	50
RQHD-M25	M25	Cover	black	5030.026.221	25
RQHD-M32	M32	Cover	black	5030.026.229	25
RQHD-M40	M40	Cover	black	5030.026.236	25
RQHV	Joiner	—	black	5030.027.201	100



FLEXA CATALOGUE

Ask for your copy of the complete Flexa Flexible Conduit catalogue

FLEXIBLE CONDUIT

LOCKNUT - METRIC HIGH QUALITY PA



Locknut for screw connections made from high quality polyamide material. Temperature range of polyamide is -30°C to +100°C. UV resistant - Halogen free.

Product Code	Size	Material	Colour	Flexa code	Packet size
GMK-M10	M10	polyamide	black	0309.000.210	100
GMK-M12	M12	polyamide	black	0309.000.212	100
GMK-M16	M16	polyamide	black	0309.000.216	100
GMK-M20	M20	polyamide	black	0309.000.220	100
GMK-M25	M25	polyamide	black	0309.000.225	100
GMK-M32	M32	polyamide	black	0309.000.232	100
GMK-M40	M40	polyamide	black	0309.000.240	50
GMK-M50	M50	polyamide	black	0309.000.250	25
GMK-M63	M63	polyamide	black	0309.000.263	10

LOCKNUT - METRIC NICKEL PLATED BRASS



Locknut for screw connections made from nickel plated brass material.

Product Code	Size	Material	Flexa code	Packet size
GM-M12	M12	Nickel plated brass	0531.000.012	100
GM-M16	M16	Nickel plated brass	0531.000.016	100
GM-M20	M20	Nickel plated brass	0531.000.020	100
GM-M25	M25	Nickel plated brass	0531.000.025	100
GM-M32	M32	Nickel plated brass	0531.000.032	100
GM-M40	M40	Nickel plated brass	0531.000.040	100
GM-M50	M50	Nickel plated brass	0531.000.050	100

Y CONNECTOR (IP69K)



Y type connector made from thermoplastic elastomer (TPE) or polyamide (PA). TPE connectors have internal circular ribs which hold the conduit in place and provide excellent compensation for vibration. TPE connector temperature range is -40°C to +150°C. PA versions have the patented quick-fit conduit connection. Temperature range of -30°C to 100°C. UV resistant - Halogen free.

Product Code	Size	Conduit O/D	Material	Colour	Flexa code	Packet size
RQY-3xM12	M12	13.0 mm	PA	black	5020.033.202	10
RQY-2xM12/M16	M12/M16	13.0/15.8 mm	PA	black	5020.033.203	10
RQY-3xM16	M16	15.8 mm	PA	black	5020.033.204	10
RQY-2xM16/M20	M16/M20	15.8/21.2 mm	TPE	black	5020.033.206	10
RQY-2xM16/M25	M16/M25	15.8/28.5 mm	TPE	black	5020.033.213	10
RQY-3xM20	M20	21.2 mm	TPE	black	5020.033.207	10
RQY-2xM20/M25	M20/M25	21.2/28.5 mm	TPE	black	5020.033.208	10
RQY-2xM25/M32	M25/M32	28.5/34.5 mm	TPE	black	5020.033.209	10
RQY-2xM32/M40	M32/M40	34.5/42.5 mm	TPE	black	5020.033.210	10
RQY-2xM40/M50	M40/M50	42.5/54.5 mm	TPE	black	5020.033.211	5



FLEXIBLE CONDUIT

T CONNECTOR (IP69K)



T type connector made from thermoplastic elastomer (TPE). TPE connectors have internal circular ribs which holds the conduit in place and provides excellent compensation for vibration. Temperature range of -40°C to $+150^{\circ}\text{C}$. Includes one fixing hole and is available in a combination of sizes. UV resistant - Halogen free.

Product Code	Size	Conduit O/D	Colour	Flexa code	Packet size
RQT-3xM10	M10	10.0 mm	black	5020.067.203	10
RQT-3xM12	M12	13.0 mm	black	5020.067.207	10
RQT-3xM16	M16	15.8 mm	black	5020.067.208	10
RQT-3xM20	M20	21.2 mm	black	5020.067.201	10
RQT-2xM20/M25	M20/M25	21.2/28.5 mm	black	5020.067.209	10
RQT-2xM25/M16	M16/M25	15.8/28.5 mm	black	5020.067.213	10
RQT-3xM25	M25	28.5 mm	black	5020.067.202	10
RQT-2xM25/M32	M25/M32	28.5/34.5 mm	black	5020.067.210	10
RQT-3xM32	M32	34.5 mm	black	5020.067.211	10
RQT-3xM40	M40	42.5 mm	black	5020.067.212	10

CONDUIT END CAP (IP67)



Conduit end cap made from thermoplastic elastomer (TPE). TPE connectors have internal circular ribs which holds the conduit in place. Temperature range of -40°C to $+150^{\circ}\text{C}$. Provides excellent transition from conduit to cable. UV resistant - Halogen free.

Product Code	Size	Conduit O/D	Colour	Flexa code	Packet size
RQE-M12	M12	13.0 mm	black	5030.012.207	50
RQE-M16	M16	15.8 mm	black	5030.012.211	50
RQE-M20	M20	21.2 mm	black	5030.012.216	50
RQE-M25	M25	28.5 mm	black	5030.012.221	25
RQE-M32	M32	34.5 mm	black	5030.012.229	25
RQE-M40	M40	42.5 mm	black	5030.012.236	25
RQE-M50	M50	54.5 mm	black	5030.012.248	10

CONDUIT JOINER (IP69K)



One piece conduit joiner made from thermoplastic elastomer (TPE). TPE connectors have internal circular ribs which holds the conduit in place and provides excellent compensation for vibration. Temperature range of -40°C to $+150^{\circ}\text{C}$. UV resistant - Halogen free.

Product Code	Size	Conduit O/D	Colour	Flexa code	Packet size
RQK-M10	M10	10.0 mm	black	5020.066.210	10
RQK-M12	M12	13.0 mm	black	5020.066.207	10
RQK-M16	M16	15.8 mm	black	5020.066.208	10
RQK-M20	M20	21.2 mm	black	5020.066.201	10
RQK-M25	M25	28.5 mm	black	5020.066.202	10
RQK-M32	M32	34.5 mm	black	5020.066.203	10
RQK-M40	M40	42.5 mm	black	5020.066.204	10
RQK-M50	M50	54.5 mm	black	5020.066.205	10

FLEXIBLE CONDUIT

CONDUIT REDUCERS (IP68/IP69K)



Straight high quality polyamide reducer with internal screw connection and patented quick-fit conduit connection. Temperature range of -40°C to +120°C. Air & liquid tight, highly resistant against acids & solvents, resistant to oil/benzene. Impact resistant - UV resistant - Halogen free.

Product Code	Size	Conduit O/D	Colour	Flexa code	Packet size
RQGR-M20/M10	M20/M10	21.2/10.0 mm	black	5601.010.221	10
RQGR-M16/M12	M16/M12	15.8/13.0 mm	black	5601.013.215	10
RQGR-M20/M16	M20/M16	21.2/15.8 mm	black	5601.015.221	10
RQGR-M25/M20	M25/M20	28.5/21.2 mm	black	5601.021.228	10
RQGR-M32/M25	M32/M25	34.5/28.5 mm	black	5601.028.234	10
RQGRM40/M32	M40/M32	42.5/34.5 mm	black	5601.034.242	10

CONNECTOR FIXING ANGLE



Passivated steel fixing angle for Metric type screw connections. Angle steel with through hole and two fastening holes.

Product Code	Size	Material	Flexa code	Packet size
BW-M16	M16	Passivated steel	5010.031.016	25
BW-M20	M20	Passivated steel	5010.031.020	25
BW-M25	M25	Passivated steel	5010.031.025	25
BW-M32	M32	Passivated steel	5010.031.032	25
BW-M40	M40	Passivated steel	5010.031.040	25
BW-M50	M50	Passivated steel	5010.031.050	25

TUBE CLAMP




Galvanized steel with rubber profile tube clamp for securely holding a pipe with single fastening screw hole. Temperature range -20°C up to + 120°C.

Product Code	Tube Ø	Product Marking	Flexa code	Packet size
SKM-M10	9-10mm	10	0308.000.007	50
SKM-M12	13-14mm	15	0308.000.009	50
SKM-M16	15-17mm	18	0308.000.011	50
SKM-M18	18-20mm	20	0308.000.013	50
SKM-M20	20-22mm	22	0308.000.016	50
SKM-M25	27-29mm	28	0308.000.021	50
SKM-M32	34-37mm	35	0308.000.029	50
SKM-M40	40-45mm	42	0308.000.036	25
SKM-M50	54-57mm	54	0308.000.048	25
SKM-MULTI	80mm	N/A	0308.000.070	10



FLEXIBLE CONDUIT

ASSEMBLY INSTRUCTIONS

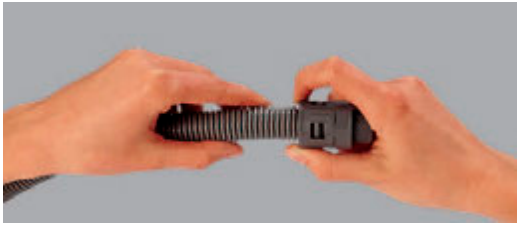

Cutting of conduit:

Cut the conduit between two ribs. More than one rib should not be passed while cutting the conduit. Flexa recommends the use of a cutting tool such as a knife or conduit cutter.

Assembly:

Push the conduit onto the connector until it cannot snap in any more and the connector can only be turned by force. The corrugated conduit pushes the claws of the adaptor between the ribs and this ensures a precise connection.

Disconnection:

This is achieved by pressing the ring toward the housing of the adaptor and then simply pulling the conduit out of the adaptor.

Conduit ratings:

In order to attain the IP ratings the above must be followed.



FURTHER INFORMATION



Ask for your copy of the complete FlexaRailway Technology catalogue



Ask for your copy of the Flexa Testing Methods technical catalogue



Ask for your copy of the Flexa High Temperature Solutions catalogue