


Technical data sheet

35 mm² series connectors, polypropylene

Item number: 2056734

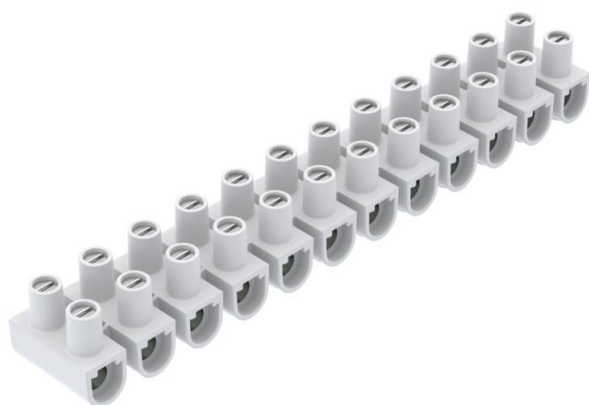

Tested to EN 60998.
Brass terminals, steel screws, electrogalvanised, 12-pole, individual terminals detachable from strips.
Captive upwards screw.
Max. approved ambient temperature to EN 60998: -5 to +80 °C.
Nominal cross-section 35 mm².
Nominal voltage 750 V.
Nominal current 125 A



PP Polypropylene

Master data

Item number	2056734
Type	80 CE WS/ORLK 35
Description 1	Terminal strip
Available from	01.11.2025
Manufacturer	OBO
Dimension	35mm ²
Colour	White
Material	Polypropylene
Smallest sales unit	120
Unit of quantity	Piece
Weight	17.37 kg
Weight unit	kg/100 pc.

Technical data sheet

35 mm² series connectors, polypropylene

Item number: 2056734



Dimensions



Length	212.6 mm
Width	36.4 mm
Height	29.2 mm

Technical data

Closing plate required	no
Connectable conductor cross-section, fine-wire without wire-end ferrule, max.	25 mm ²
Connectable conductor cross-section, fine-wire without wire-end ferrule, min.	25 mm ²
Connectable conductor cross-section, multi-wire, max.	35 mm ²
Connectable conductor cross-section, multi-wire, min.	35 mm ²
Connection position	Side
No. of terminals	12
Number of screwless terminals per pole	2
Version of electrical connection 1	Screw connection
Version of electrical connection 2	Screw connection
Drill hole spacing, centre	18 mm
Explosion-tested version	no
Suitable for flexible conductors	yes
Suitable for solid conductors	yes
Suitable for multi-wire conductors	yes
Mounting type	Direct mounting
Nominal cross-section, min.	35 mm ²
Nominal voltage	750 V
Nominal current	125 A
Pole number	12
Cross-section	Max. attachment each side: 35mm ² flexible or 25 mm ² rigid. mm ²
Permitted temperature range, max.	80 °C
Permitted temperature range, min.	-5 °C
Transparent	no
Ambient temperature	80 °C