



PPVK 1,5/6A/OG GR

27053.6

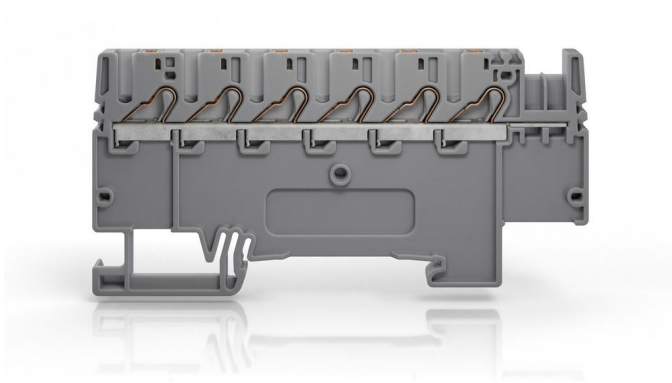

Feed-through terminal, push-in connection, mounting type: TS 35, rated cross-section: 1.5 mm², width: 3.5 mm, color: grey, pusher color: orange

Commercial

General

Colour: Grey

Country of origin: BG

Customs number: 85369010

GTIN (EAN): 4044211255145

Packaging unit: 50

Product description: Distribution terminal block

Quantity unit: PC

Unit of weight: G

Weight per piece (including packaging): 8.674g

Weight per piece (not including packaging): 7.934g

Technical

Dimensions

Height: 42mm

Height TS 35/7.5: 43.5mm

Length: 86mm

Width: 3.5mm

Ratings

Contamination degree: 3

Maximum power dissipation for nominal condition: 0.56W

Overvoltage category: III

Rated cross-section: 1.5mm²

Rated current: 16A

Rated impulse voltage: 4kV

Rated voltage: 250V

Connection data

Connection position: Top

Connection principle: Push-in connection

Connections: 6

Number of levels: 1

Number of terminals per level: 6

Stripping length: 8mm

Wire cross-section AWG, max.: 14

Wire cross-section AWG, min.: 26

Wire cross-section single core (rigid)/stranded, max.: 1.5mm²

Wire cross-section single-core (rigid) / stranded, min.: 0.25mm²

Wire cross-section stranded with wire-end ferrules, max.: 1mm²

Wire cross-section stranded with wire-end ferrules, min.: 0.25mm²

Wire cross-section stranded, max.: 1.5mm²

Wire cross-section stranded, min.: 0.25mm²

Further technical data

End plate required: ✓

Gauge plug acc. to EN 60 947-1: A1

Mounting type: Mounting rail TS 35/7,5 and TS 35/15

Number of cross-connection channels: 2

Materials

Flammability class UL 94: V-0

Insulation housing: Polyamide 6.6

Working temperature, max.: 120°C

Working temperature, min.: -40°C

Approvals

Environment

Environmental Product Compliance

EU-POP Conform: Yes

PROP 65 Conform: Yes

REACH Candidate Substance Note: No

REACH Conform: Yes

REACH Reference date: 2026-02-04

RoHS Conform: Yes

TSCA Conform: Yes

Accessories

End plate



PAPVK 1,5/6A GR
[27173.6](#)

End stop



ZES 35 BG
[3748.2](#)



ZES 35/2 BG
[3811.2](#)

Insulated cross-connector



PQI 1,5/10 BU

27130.5



PQI 1,5/20 BU

27131.5



PQI 1,5/2 BU

27122.5



PQI 1,5/3 BU

27123.5



PQI 1,5/4 BU

27124.5



PQI 1,5/5 BU

27125.5



PQI 1,5/9 BU

27129.5

Quick marking



PC-SB 3,5X5/56 WH

28350.7



MC SB 3,5x5/100 FW 1-10 WH

28393.7



MC SB 3,5x5/100 So WH
28391.7



PC/HF-SB 3,5x5/57 WH
33635.7

Screwdriver



SDB 0,4x2,0
3164.0
