

# PROCON HEAVY DUTY CONNECTORS - A3/A4/A5

## PRODUCT SELECTION GUIDE

Inserts: 3 Pole & Earth, 4 Pole & Earth - Male & Female



Housing Options in Plastic or Aluminium



Cable Clamping Options



Please note: Housings shown here have the Cable Clamping options fitted

## PRODUCT ASSEMBLY PROCEDURE

### STEP 1:

Select the type of Inserts required from the following options:

- Screw Terminal with Wire Guard
- Screw Terminal without Wire Guard
- Screwless Terminal
- Crimp Contact Carriers

All Inserts include an Earth Connection.

When selecting Crimp Solutions you need to also include the Crimp Pin (Male) and Crimp Sleeve (Female) items.

### STEP 2:

Select Housings from the following options:

- Single or Double Lever Format
- Wall Mounted Housings
- Panel Mounted Housings
- Housings with Covers
- Coupler Hoods
- Hoods with Side Cable Entry
- Hoods with Top Cable Entry

Double Lever solution is not available in all formats.

### STEP 3:

Select the Cable Clamping solution from the following options:

- Bush set which comes complete with nickel coated brass bush, washers and "onion ring" type seal
- Metal Gland which is supplied complete with nickel coated brass collar, brass bush, washers and "onion ring" type seal

Cable clamping solutions are available from Wiska such as compression glands in both nickel plated brass and nylon, spiral glands and trumpet glands.

Please refer to the Wiska section of the catalogue for further product solutions.

# PROCON HEAVY DUTY CONNECTORS - A3/A4/A5

## A3/A4 SERIES - 3 POLE & EARTH / 4 POLE & EARTH INSERTS - 400V/10A



700103

- 700103 Female - 3 Pole & Earth Screw Connection Insert, 0.5 to 1.5 mm<sup>2</sup>
- 700203 Male - 3 Pole & Earth Screw Connection Insert, 0.5 to 1.5 mm<sup>2</sup>
- 700104 Female - 4 Pole & Earth Screw Connection Insert, 0.5 to 1.5 mm<sup>2</sup>
- 700204 Male - 4 Pole & Earth Screw Connection Insert, 0.5 to 1.5 mm<sup>2</sup>

## A5 SERIES - 5 POLE & EARTH CRIMP INSERTS - 400V/16A



700105

- 700105 Crimp Contact Carrier for Sleeve Contacts (female) - 5 Pole & Earth - 0.14-2.5mm<sup>2</sup>
- 700205 Crimp Contact Carrier for Sleeve Contact Pin (male) - 5 Pole & Earth - 0.14-2.5mm<sup>2</sup>
- 710508 Crimp Sleeve Contact B Series - 0.14-0.37mm<sup>2</sup>
- 710504 Crimp Sleeve Contact B Series - 0.5 mm<sup>2</sup>
- 710509 Crimp Sleeve Contact B Series - 0.75mm<sup>2</sup>
- 710500 Crimp Sleeve Contact B Series - 1 mm<sup>2</sup>
- 710501 Crimp Sleeve Contact B Series - 1.5 mm<sup>2</sup>
- 710502 Crimp Sleeve Contact B Series - 2.5 mm<sup>2</sup>
- 710518 Crimp Pin Contact B Series - 0.14-0.37mm<sup>2</sup>
- 710514 Crimp Pin Contact B Series - 0.5 mm<sup>2</sup>
- 710519 Crimp Pin Contact B Series - 0.75mm<sup>2</sup>
- 710510 Crimp Pin Contact B Series - 1 mm<sup>2</sup>
- 710511 Crimp Pin Contact B Series - 1.5 mm<sup>2</sup>
- 710512 Crimp Pin Contact B Series - 2.5 mm<sup>2</sup>
- 700734 Coding Pin suitable for Crimp Contact Carriers



710501



710511

## HOODS & HOUSINGS ALUMINIUM - IP65 GREY



704303



T702803MS & 717637

- T701403 Wall Housing - Single Lever System - with M20 Threaded Hole - Height 25.5mm
- 704303 Panel Housing - Single Lever - Height 24mm
- 704403 Panel Housing with Spring Cover - Single Lever - Height 24mm
- 7044030D Panel Housing with Spring Cover - Single Lever - Height 24mm for male insert
- 704503 Angle Panel Housing - Single Lever - Height 25.5mm
- T702803MS Hood - Top Entry Single Lever - with M20 Collar - Height 57mm
- T702603MS Angle Hood - Top Entry Single Lever System - with M20 Collar - Height 48mm
- T703803MS Coupler Hood - Top Entry Single Lever System - with M20 Collar - Height 60.5mm

# PROCON HEAVY DUTY CONNECTORS - A3/A4/A5

## HOODS & HOUSINGS PLASTIC - IP65 GREY



700621

- |               |  |
|---------------|--|
| <b>700621</b> | Panel Housing - Single Lever - Height 24mm                                     |
| 700622        | Angle Panel Housing - Single Lever - Height 25.5mm                             |
| T700620       | Wall Housing - Single Lever - M25 Entry - Height 24mm                          |
| T700624MS     | Angle Hood - Top Entry Single Lever System - with M20 Collar - Height 48mm     |
| T700625MS     | Hood -Top Entry Single Lever System - with M20 Collar - Height 57mm            |
| T700623MS     | Coupler Hood - Top Entry Single Lever System - with M20 Collar - Height 60.5mm |



# PROCON HEAVY DUTY CONNECTORS - A10

## A10 SERIES - 10 POLE & EARTH INSERTS - 250V/16AMP



- 700110** Female - 10 Pole & Earth Insert - Screw Connection, 0.5 to 2.5 mm<sup>2</sup>  
**700210** Male - 10 Pole & Earth Insert - Screw Connection, 0.5 to 2.5 mm<sup>2</sup>

## HOODS & HOUSINGS - SINGLE LEVER - IP65



T702610MS &  
717637

- T702610MS** Hood - Side Entry Single Lever - with M20 Collar - Height 53mm - IP65  
**T708710** Hood - Side Entry Single Lever - with M25 Threaded Hole - Height 66mm - IP65  
**704310** Panel Housing - Single Lever - Height 26mm - IP65  
**704410** Panel Housing with Spring Cover - Single Lever - Height 26mm - IP65

# PROCON HEAVY DUTY CONNECTORS - A16

## A16 SERIES - 16 POLE & EARTH INSERTS - 250V/16AMP



- |               |   |
|---------------|---|
| <b>700116</b> | Female 16 Pole & Earth Screw Connection Insert, 0.5 to 2.5mm <sup>2</sup> |
| <b>700216</b> | Male 16 Pole & Earth Screw Connection Insert, 0.5 to 2.5mm <sup>2</sup>   |

## A16 SERIES - 16 POLE & EARTH CRIMP INSERTS - 250V/16AMP



700416



710501



710511

- |               |  |
|---------------|--|
| <b>700316</b> | Crimp Contact Carrier for Sleeve (Female) - 6 Pole & Earth - 0.5 to 4mm <sup>2</sup>     |
| <b>700416</b> | Crimp Contact Carrier for Pin Contacts (Male) - 6 Pole & Earth - 0.5 to 4mm <sup>2</sup> |
| <b>710508</b> | Crimp Sleeve Contact B Series - 0.14-0.37mm <sup>2</sup>                                 |
| <b>710504</b> | Crimp Sleeve Contact B Series - 0.5 mm <sup>2</sup>                                      |
| <b>710509</b> | Crimp Sleeve Contact B Series - 0.75mm <sup>2</sup>                                      |
| <b>710500</b> | Crimp Sleeve Contact B Series - 1 mm <sup>2</sup>  |
| <b>710501</b> | Crimp Sleeve Contact B Series - 1.5 mm <sup>2</sup>                                      |
| <b>710502</b> | Crimp Sleeve Contact B Series - 2.5 mm <sup>2</sup>                                      |
| <b>710503</b> | Crimp Sleeve Contacts B Series - 4.0 mm <sup>2</sup>                                     |
| <b>710518</b> | Crimp Pin Contact B Series - 0.14-0.37mm <sup>2</sup>                                    |
| <b>710514</b> | Crimp Pin Contact B Series - 0.5 mm <sup>2</sup>   |
| <b>710519</b> | Crimp Pin Contact B Series - 0.75mm <sup>2</sup>   |
| <b>710510</b> | Crimp Pin Contact B Series - 1 mm <sup>2</sup>   |
| <b>710511</b> | Crimp Pin Contact B Series - 1.5 mm <sup>2</sup>   |
| <b>710512</b> | Crimp Pin Contact B Series - 2.5 mm <sup>2</sup>   |
| <b>710513</b> | Crimp Pin Contacts B Series - 4.0 mm <sup>2</sup>  |
| <b>700734</b> | Coding Pin suitable for Crimp Contact Carriers   |

## HOODS & HOUSINGS - SINGLE LEVER - IP65



T702616MS &  
717637

- |                  |   |
|------------------|---|
| <b>T702616MS</b> | Hood - Side Entry Single Lever System - with M20 Collar - Height 58mm |
| <b>T702816MS</b> | Hood - Top Entry Single Lever System - with M20 Collar - Height 58mm  |
| <b>704316</b>    | Panel Housing - Single Lever System - Height 26mm - IP65              |



# PROCON HEAVY DUTY CONNECTORS - A32

## A32 SERIES - 32 POLE & EARTH INSERTS - 250V/16AMP



700116 & 700132

<b>700116</b>	Female 16 Pole & Earth Screw Connection Insert, 0.5 to 2.5 mm <sup>2</sup>
<b>700132</b>	Female 16 Pole & Earth Screw Connection Insert, 0.5 to 2.5 mm <sup>2</sup> (17-32)
<b>700216</b>	Male 16 Pole & Earth Screw Connection Insert, 0.5 to 2.5 mm <sup>2</sup>
<b>700232</b>	Male 16 Pole & Earth Screw Connection Insert, 0.5 to 2.5 mm <sup>2</sup> (17-32)

## A32 SERIES - 32 POLE & EARTH CRIMP INSERTS - 250V/16AMP



700316



710500



710510

<b>700316</b>	Crimp Contact Carrier for Sleeve Contacts - 16 Pole & Earth, 0.5 to 4 mm <sup>2</sup>
<b>700416</b>	Crimp Contact Carrier for Pin Contacts - 16 Pole & Earth, 0.5 to 4 mm <sup>2</sup>
<b>700332</b>	Crimp Contact Carrier for Sleeve Contacts - 16 Pole & Earth, (17/32)
<b>700432</b>	Crimp Contact Carrier for Pin Contacts - 16 Pole & Earth, (17-32)
<b>710508</b>	Crimp Sleeve Contact B Series - 0.14-0.37mm <sup>2</sup>
<b>710504</b>	Crimp Sleeve Contact B Series - 0.5 mm <sup>2</sup>
<b>710509</b>	Crimp Sleeve Contact B Series - 0.75mm <sup>2</sup>
<b>710500</b>	Crimp Sleeve Contact B Series - 1 mm <sup>2</sup>
<b>710501</b>	Crimp Sleeve Contact B Series - 1.5 mm <sup>2</sup>
<b>710502</b>	Crimp Sleeve Contact B Series - 2.5 mm <sup>2</sup>
<b>710503</b>	Crimp Sleeve Contacts B Series - 4.0 mm <sup>2</sup>
<b>710518</b>	Crimp Pin Contact B Series - 0.14-0.37mm <sup>2</sup>
<b>710514</b>	Crimp Pin Contact B Series - 0.5 mm <sup>2</sup>
<b>710519</b>	Crimp Pin Contact B Series - 0.75mm <sup>2</sup>
<b>710510</b>	Crimp Pin Contact B Series - 1 mm <sup>2</sup>
<b>710511</b>	Crimp Pin Contact B Series - 1.5 mm <sup>2</sup>
<b>710512</b>	Crimp Pin Contact B Series - 2.5 mm <sup>2</sup>
<b>710513</b>	Crimp Pin Contacts B Series - 4.0 mm <sup>2</sup>
<b>700734</b>	Coding Pin suitable for Crimp Contact Carriers


## HOODS & HOUSING - DOUBLE LEVER - IP65



<b>T708132</b>	Hood - Side Entry Double Lever System - with M32 Threaded Hole - Height 76mm
<b>704132</b>	Panel Housing - Double Lever System - Height 28mm - IP65

# PROCON HEAVY DUTY CONNECTORS - B SERIES

## PRODUCT SELECTION GUIDE

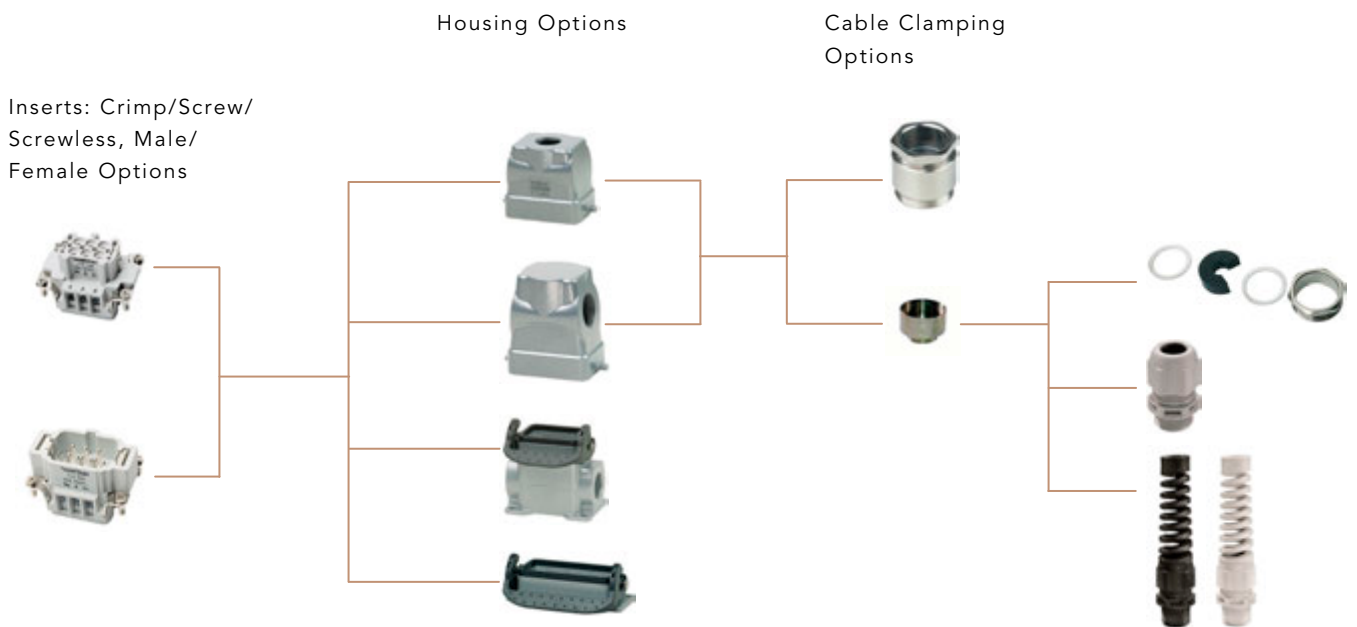

## PRODUCT ASSEMBLY PROCEDURE

### STEP 1:

Select the type of Inserts required from the following options:

- Screw Terminal with Wire Guard
- Screw Terminal without Wire Guard
- Screwless Terminal
- Crimp Contact Carriers

All Inserts include an Earth Connection.

When selecting Crimp Solutions you need to also include the Crimp Pin (Male) and Crimp Sleeve (Female) items.

### STEP 2:

Select Housings from the following options:

- Single or Double Lever Format
- Wall Mounted Housings
- Panel Mounted Housings
- Housings with Covers
- Coupler Hoods
- Hoods with Side Cable Entry
- Hoods with Top Cable Entry

Double Lever solution is not available in all formats.

### STEP 3:

Select the Cable Clamping solution from the following options:

- Bush set which comes complete with nickel coated brass bush, washers and "onion ring" type seal
- Metal Gland which is supplied complete with nickel coated brass collar, brass bush, washers and "onion ring" type seal

Other cable clamping solutions are available from Wiska such as compression glands in both nickel plated brass and nylon, spiral glands and trumpet glands.

Please refer to the Wiska section of the catalogue for further product solutions.

# PROCON HEAVY DUTY CONNECTORS - B6

## B6 SERIES - 6 POLE & EARTH INSERTS - 500V/16AMP



- 710106 Female 6 Pole & Earth Screw Connection Insert with Wire Guard - 0.5 to 2.5mm<sup>2</sup>
- 710206 Male 6 Pole & Earth Screw Connection Insert with Wire Guard - 0.5 to 2.5mm<sup>2</sup>
- 710769 Female 6 Pole & Earth Screw Connection Insert without Wire Guard - 0.5 to 4mm<sup>2</sup>
- 710773 Male 6 Pole & Earth Screw Connection Insert without Wire Guard - 0.5 to 4mm<sup>2</sup>

710106

- 71010604 Female 6 Pole & Earth Insert with Push-In Terminals - 0.5 to 2.5mm<sup>2</sup>



- 71020604 Male 6 Pole & Earth Insert with Push-In Terminals - 0.5 to 2.5mm<sup>2</sup>

710607

- 710607 Coding Pin

## B6 SERIES - 6 POLE & EARTH CRIMP INSERTS - 500V/16AMP



- 710306 Crimp Contact Carrier for Sleeve Contacts (Female) - 6 Pole & Earth - 0.5 to 4mm<sup>2</sup>

- 710406 Crimp Contact Carrier for Pin Contacts (Male) - 6 Pole & Earth - 0.5 to 4mm<sup>2</sup>

- 710508 Crimp Sleeve Contact B Series - 0.14-0.37mm<sup>2</sup>

- 710504 Crimp Sleeve Contact B Series - 0.5 mm<sup>2</sup>

710406

- 710509 Crimp Sleeve Contact B Series - 0.75mm<sup>2</sup>

- 710500 Crimp Sleeve Contact B Series - 1 mm<sup>2</sup>

- 710501 Crimp Sleeve Contact B Series - 1.5 mm<sup>2</sup>



710501

- 710502 Crimp Sleeve Contact B Series - 2.5 mm<sup>2</sup>

- 710503 Crimp Sleeve Contacts B Series - 4.0 mm<sup>2</sup>

- 710518 Crimp Pin Contact B Series - 0.14-0.37mm<sup>2</sup>



710511

- 710514 Crimp Pin Contact B Series - 0.5 mm<sup>2</sup>

- 710519 Crimp Pin Contact B Series - 0.75mm<sup>2</sup>

- 710510 Crimp Pin Contact B Series - 1 mm<sup>2</sup>

- 710511 Crimp Pin Contact B Series - 1.5 mm<sup>2</sup>

- 710512 Crimp Pin Contact B Series - 2.5 mm<sup>2</sup>

- 710513 Crimp Pin Contacts B Series - 4.0 mm<sup>2</sup>

- 700734 Coding Pin suitable for Crimp Contact Carriers

## HOODS - SINGLE LEVER - IP65



712806

- P712606 Hood - Side Entry Single Lever System - with M20 Threaded Hole - Height 56mm

- P758624 Hood - Side Entry Single Lever System - with M25 Threaded Hole - Height 72mm

- P712806 Hood - Top Entry Single Lever System - with M20 Threaded Hole - Height 56mm

- P758824 Hood - Top Entry Single Lever System - with M25 Threaded Hole - Height 72mm

- P713806 Coupler Hood - Top Entry Single Lever System - with M20 Threaded Hole - 61.5mm

- P753824 Coupler Hood - Top Entry Single Lever System - with M25 Threaded Hole - 77.5mm

- P753824AQ Coupler Hood - Top Entry Single Lever (Steel) - with M25 Threaded Hole - 77.5mm

## WALL & PANEL HOUSINGS - SINGLE LEVER - IP65



714306

- 714306 Panel Housing - Single Lever System - Height 28mm

- 714306AQ Panel Housing - Single Lever System (Steel) - Height 28mm

- P711406MS Wall Housing - Single Lever - with M20 Collar - Height 53mm

- 714406 Panel Housing with Hinged Cover - Single Lever - Height 28mm

- 714406SK Panel Housing with Self Closing Spring Cover - Single Lever - Height 28mm

## ACCESSORIES



710630

- 710630 Protective Cap - Single Lever - Plastic - Height 18mm

- 710630AL Protective Cap - Single Lever - Aluminium - Height 18mm



# PROCON HEAVY DUTY CONNECTORS - B6

## B10 SERIES - 10 POLE & EARTH INSERTS - 500V/16AMP



710110



710607

<b>710110</b>	Female 10 Pole & Earth Screw Connection Insert with Wire Guard, 0.5 - 2.5 mm <sup>2</sup>
<b>710210</b>	Male 10 Pole & Earth Screw Connection Insert with Wire Guard, 0.5 - 2.5 mm <sup>2</sup>
<b>710770</b>	Female 10 Pole & Earth Screw Connection Insert without Wire Guard, 0.5 - 4 mm <sup>2</sup>
<b>710774</b>	Male 10 Pole & Earth Screw Connection Insert without Wire Guard, 0.5 - 4 mm <sup>2</sup>
<b>71011004</b>	Female 10 Pole & Earth Insert with Push in Terminals 0.5 - 2.5mm <sup>2</sup>
<b>71021004</b>	Male 10 Pole & Earth Insert with Push in Terminals 0.5 - 2.5mm <sup>2</sup>
<b>710607</b>	Coding Pin

## B10 SERIES - 10 POLE & EARTH CRIMP INSERTS - 500V/16AMP



710410



710511



710500

<b>710310</b>	Crimp Contact Carrier for Sleeve Contacts - 0.5 to 4 mm <sup>2</sup>
<b>710410</b>	Crimp Contact Carrier for Pin Contacts - 0.5 to 4 mm <sup>2</sup>
<b>710508</b>	Crimp Sleeve Contact B Series - 0.14-0.37mm <sup>2</sup>
<b>710504</b>	Crimp Sleeve Contact B Series - 0.5 mm <sup>2</sup>
<b>710509</b>	Crimp Sleeve Contact B Series - 0.75mm <sup>2</sup>
<b>710500</b>	Crimp Sleeve Contact B Series - 1 mm <sup>2</sup>
<b>710501</b>	Crimp Sleeve Contact B Series - 1.5 mm <sup>2</sup>
<b>710502</b>	Crimp Sleeve Contact B Series - 2.5 mm <sup>2</sup>
<b>710503</b>	Crimp Sleeve Contacts B Series - 4.0 mm <sup>2</sup>
<b>710518</b>	Crimp Pin Contact B Series - 0.14-0.37mm <sup>2</sup>
<b>710514</b>	Crimp Pin Contact B Series - 0.5 mm <sup>2</sup>
<b>710519</b>	Crimp Pin Contact B Series - 0.75mm <sup>2</sup>
<b>710510</b>	Crimp Pin Contact B Series - 1 mm <sup>2</sup>
<b>710511</b>	Crimp Pin Contact B Series - 1.5 mm <sup>2</sup>
<b>710512</b>	Crimp Pin Contact B Series - 2.5 mm <sup>2</sup>
<b>710513</b>	Crimp Pin Contacts B Series - 4.0 mm <sup>2</sup>
<b>700734</b>	Coding Pin suitable for Crimp Contact Carriers

## HOODS - DOUBLE LEVER - IP65



P712210

<b>P712110</b>	Hood - Side Entry Double Lever System - with M20 Threaded Hole - Height 56mm
<b>P758042</b>	Hood - Side Entry Double Lever System - with M25 Threaded Hole - Height 56mm
<b>P758142</b>	Hood - Side Entry Double Lever System - with M32 Threaded Hole - Height 72mm
<b>P712210</b>	Hood - Top Entry Double Lever System - with M20 Threaded Hole - Height 56mm
<b>P712310</b>	Hood - Top Entry Double Lever System - with M25 Threaded Hole - Height 56mm
<b>P758342</b>	Hood - Top Entry Double Lever System - with M32 Threaded Hole - Height 72mm
<b>P713610</b>	Coupler Hood - Top Entry Double Lever System - with M20 Threaded Hole - 61.5mm
<b>P753742</b>	Coupler Hood - Top Entry Double Lever System - with M32 Threaded Hole - 77.5mm

## WALL & PANEL HOUSINGS - DOUBLE LEVER - IP65



714110

<b>714110</b>	Panel Housing - Double Lever System - Height 28mm
<b>P711010MS</b>	Wall Housing with Single M20 Collar - Double Lever System - Height 53mm
<b>P757042MS</b>	Wall Housing with Single M32 Collar - Double Lever System - Height 74mm

# PROCON HEAVY DUTY CONNECTORS - B10

## ACCESSORIES - DOUBLE LEVER



- 710624** Protective Cap with retaining cord - Double Lever System - Plastic - Height 18mm  
**710624AL** Protective Cap with retaining cord - Double Lever System - Aluminium - Height 18mm

710624

## HOODS - SINGLE LEVER - IP65



- P712610** Hood - Side Entry Single Lever System - with M20 Threaded Hole - Height 56mm  
**P758642** Hood - Side Entry Single Lever System - with M25 Threaded Hole - Height 72mm  
**P712810** Hood - Side Entry Single Lever System - with M20 Threaded Hole - Height 56mm  
**P758842** Hood - Top Entry Single Lever System - with M25 Threaded Hole - Height 72mm  
**P713810** Coupler Hood - Top Entry Single Lever System - with M20 Threaded Hole - 61.5mm  
**P753842** Coupler Hood - Top Entry Single Lever System - with M25 Threaded Hole - 77.5mm  
**P753842AQ** Coupler Hood - Top Entry Single Lever (Steel) - with M25 Threaded Hole - 77.5mm

P758642

## WALL & PANEL HOUSINGS - SINGLE LEVER - IP65



- 714310** Panel Housing - Single Lever System - Height 28mm  
**714310AQ** Panel Housing - Single Lever System (Steel Lever) - Height 28mm  
**714410** Panel Housing with Spring Cover - Single Lever System - Height 27mm plus cover  
**P711410MS** Wall Housing with Single M20 Collar - Single Lever System - Height 74mm

714310

## ACCESSORIES - SINGLE LEVER



- 710632** Protective Cap - Single Lever System - Plastic - Height 18mm  
**710632AL** Protective Cap - Single Lever System - Aluminium - Height 18mm

## HOODS & HOUSINGS - REVERSE DOUBLE LEVER - IP65



- P753242** Hood with clips - Top Entry Double Locking System - with M25 Threaded Hole - 72mm  
**P753342** Hood with clips - Top Entry Double Locking System - with M32 Threaded Hole - 72mm  
**714210** Panel Housing with Spring Cover without clips - Double Locking - 27mm plus Cover

# PROCON HEAVY DUTY CONNECTORS - B16

## B16 SERIES - 16 POLE & EARTH INSERT - 500V/16AMP



710116 Female Insert - 16 Pole - Screw Term. plus Wire Guard - 500V, / 16A, 0.5 to 2.5 mm<sup>2</sup>

710216 Male Insert - 16 Pole - Screw Term. plus Wire Guard - 500V / 16A, 0.5 to 2.5 mm<sup>2</sup>

710116

710771 Female Insert - 16 Pole - Screw Term. no Wire Guard - 500V / 16A, 0.5 to 4 mm<sup>2</sup>

710775 Male Insert - 16 Pole - Screw Term. no Wire Guard - 500V / 16A, 0.5 to 4 mm<sup>2</sup>



710607

71011604 Female 16 Pole & Earth Insert with Push-in Terminals - 0.5 to 2.5mm<sup>2</sup>

71021604 Male 16 Pole & Earth Insert with Push-in Terminals - 0.5 to 2.5mm<sup>2</sup>

710607 Coding Pin

## B16 SERIES - 16 POLE & EARTH INSERT - 500V/16AMP



710316 Crimp Contact Carrier for Sleeve Contacts - 16 Pole 500V, 16 Amps, 0.5 to 4 mm<sup>2</sup>

710416 Crimp Contact Carrier for Pin Contacts - 16 Pole 500V, 16 Amps, 0.5 to 4 mm<sup>2</sup>

710316

710504 Crimp Sleeve Contact B Series - 0.5 mm<sup>2</sup>

710509 Crimp Sleeve Contact B Series - 0.75mm<sup>2</sup>



710501

710500 Crimp Sleeve Contact B Series - 1 mm<sup>2</sup>

710501 Crimp Sleeve Contact B Series - 1.5 mm<sup>2</sup>

710502 Crimp Sleeve Contact B Series - 2.5 mm<sup>2</sup>



710511

710503 Crimp Sleeve Contacts B Series - 4.0 mm<sup>2</sup>

710518 Crimp Pin Contact B Series - 0.14-0.37mm<sup>2</sup>

710514 Crimp Pin Contact B Series - 0.5 mm<sup>2</sup>

710519 Crimp Pin Contact B Series - 0.75mm<sup>2</sup>

710510 Crimp Pin Contact B Series - 1 mm<sup>2</sup>

710511 Crimp Pin Contact B Series - 1.5 mm<sup>2</sup>

710512 Crimp Pin Contact B Series - 2.5 mm<sup>2</sup>

710513 Crimp Pin Contacts B Series - 4.0 mm<sup>2</sup>

700734 Coding Pin suitable for Crimp Contact Carriers

## HOODS - DOUBLE LEVER - IP65



P728140

P718016 Hood - Side Entry Double Lever - with M25 Threaded Hole - Height 65mm

P728140 Hood - Side Entry Double Lever - with M32 Threaded Hole - Height 76mm

P72814040 Hood - Side Entry Double Lever - with M40 Threaded Hole - Height 76mm

P718216 Hood - Top Entry Double Lever - with M25 Threaded Hole - Height 65mm

P718316 Hood - Top Entry Double Lever - with M32 Threaded Hole - Height 65mm

P713616 Coupler Hood - Top Entry Double Lever - with M25 Threaded Hole - Height 70.5mm

P753772 Coupler Hood - Top Entry Double Lever - with M32 Threaded Hole - Height 81.5mm

P75377240 Coupler Hood - Top Entry Double Lever - with M40 Threaded Hole - Height 81.5mm

## WALL & PANEL HOUSINGS - DOUBLE LEVER - IP65



714116

714116 Panel Housing - Double Lever - Height 28mm

P711016MS Wall Housing with Single M25 Collar - Double Lever - Height 68mm

P75707240MS Wall Housing with Single M40 Collar - Double Lever - Height 84mm

# PROCON HEAVY DUTY CONNECTORS - B16

## ACCESSORIES - DOUBLE LEVER



- 710626 Protective Cap - Single Lever - Plastic - Height 18mm  
710626AL Protective Cap - Double Locking System - Aluminium - Height 18mm

## HOODS - SINGLE LEVER - IP65



718916

- P718616 Hood - Side Entry Single Lever - with M25 Threaded Hole - Height 65mm  
P718716 Hood - Side Entry Single Lever - with M32 Threaded Hole - Height 65mm  
P72874040 Hood - Side Entry Single Lever - with M40 Threaded Hole - Height 76mm  
P718816 Hood - Top Entry Single Lever - with M25 Threaded Hole - Height 65mm  
P718916 Hood - Top Entry Single Lever - with M32 Threaded Hole - Height 65mm  
P713816 Coupler Hood - Top Entry Single Lever - with M25 Threaded Hole - Height 70.5mm  
P713916 Coupler Hood - Top Entry Single Lever - with M32 Threaded Hole - Height 70.5mm

## WALL & PANEL HOUSINGS - SINGLE LEVER - IP65



714316

- 714316 Panel Housing - Single Lever System - Height 27mm  
714416 Panel Housing with Spring Cover - Single Lever System - Height 27mm plus Cover  
P711416MS Wall Housing with Single M25 Collar - Single Lever System - Height 68mm  
P711616MS Wall Housing with Spring Cover & Single M25 Collar - Single Locking - 68mm plus Cover



## ACCESSORIES - SINGLE LEVER






- 710634 Protective Cap - Single Lever - Plastic - Height 18mm  
710634AL Protective Cap - Single Lever - Aluminium - Height 18mm

# PROCON HEAVY DUTY CONNECTORS - B24


## B24 SERIES - 24 POLE & EARTH INSERTS - 500V/16AMP

	<b>710124</b>	Female Insert - 24 Pole - Screw Term. plus Wire Guard - 500V / 16A, 0.5 to 2.5mm <sup>2</sup>
	<b>710224</b>	Male Insert - 24 Pole - Screw Term. plus Wire Guard - 500V / 16A, 0.5 to 2.5 mm <sup>2</sup>
710124	<b>710772</b>	Female Insert - 24 Pole - Screw Term. no Wire Guard - 500V / 16A, 0.5 to 4 mm <sup>2</sup>
	<b>710776</b>	Male Insert - 24 Pole - Screw Term. no Wire Guard - 500V / 16A, 0.5 to 4 mm <sup>2</sup>
	<b>71012404</b>	Female 24 Pole & Earth Insert Push-in Terminals, 0.5 to 25mm2
	<b>71022404</b>	Male 24 Pole & Earth Insert Push-in Terminals, 0.5 to 25mm2
710224	<b>710 607</b>	Coding Pin


## B24 SERIES - 24 POLE CRIMP INSERTS - 500V/16AMP

	<b>710324</b>	Crimp Contact Carrier for Sleeve Contacts - 24 Pole 500V, 16 Amps, 0.5 to 4 mm <sup>2</sup>
	<b>710424</b>	Crimp Contact Carrier for Pin Contacts - 24 Pole 500V, 16 Amps, 0.5 to 4 mm <sup>2</sup>
710324	<b>710508</b>	Crimp Sleeve Contact B Series - 0.14-0.37mm <sup>2</sup>
	<b>710504</b>	Crimp Sleeve Contact B Series - 0.5 mm <sup>2</sup>
	<b>710509</b>	Crimp Sleeve Contact B Series - 0.75mm <sup>2</sup>
	<b>710500</b>	Crimp Sleeve Contact B Series - 1 mm <sup>2</sup>
710501	<b>710501</b>	Crimp Sleeve Contact B Series - 1.5 mm <sup>2</sup>
	<b>710502</b>	Crimp Sleeve Contact B Series - 2.5 mm <sup>2</sup>
	<b>710503</b>	Crimp Sleeve Contacts B Series - 4.0 mm <sup>2</sup>
710511	<b>710518</b>	Crimp Pin Contact B Series - 0.14-0.37mm <sup>2</sup>
	<b>710514</b>	Crimp Pin Contact B Series - 0.5 mm <sup>2</sup>
	<b>710519</b>	Crimp Pin Contact B Series - 0.75mm <sup>2</sup>
	<b>710510</b>	Crimp Pin Contact B Series - 1 mm <sup>2</sup>
	<b>710511</b>	Crimp Pin Contact B Series - 1.5 mm <sup>2</sup>
	<b>710512</b>	Crimp Pin Contact B Series - 2.5 mm <sup>2</sup>
	<b>710513</b>	Crimp Pin Contacts B Series - 4.0 mm <sup>2</sup>
	<b>700734</b>	Coding Pin suitable for Crimp Contact Carriers

## HOODS - DOUBLE LEVER - IP65

	<b>P712024</b>	Hood - Side Entry Double Lever - with M25 Threaded Hole - Height 65mm
	<b>P712124</b>	Hood - Side Entry Double Lever - with M32 Threaded Hole - Height 65mm
	<b>P71812440</b>	Hood - Side Entry Double Lever - with M40 Threaded Hole - Height 76mm
	<b>P712224</b>	Hood - Top Entry Double Lever - with M25 Threaded Hole - Height 65mm
712124	<b>P718324</b>	Hood - Top Entry Double Lever - with M32 Threaded Hole - Height 65mm
	<b>P71832440</b>	Hood - Top Entry Double Lever - with M40 Threaded Hole - Height 76mm

## WALL & PANEL HOUSINGS - DOUBLE LEVER - IP65

	<b>714124</b>	Panel Housing - Double Lever - Height 28mm
	<b>P711024MS</b>	Wall Housing with Single M25 Collar - Double Lever - Height 68mm
	<b>P757008MS</b>	Wall Housing with Single M32 Collar - Double Lever - Height 84mm
711024MS	<b>P75700840MS</b>	Wall Housing with Single M40 Collar - Double Lever - Height 84mm



# PROCON HEAVY DUTY CONNECTORS - B24

## HOOD - SINGLE LEVER - IP65



P712724

- P712624** Hood - Side Entry Single Lever - with M25 Threaded Hole - Height 65mm
- P712724** Hood - Side Entry Single Lever - with M32 Threaded Hole - Height 65mm
- P71872440 Hood - Side Entry Single Lever - with M40 Threaded Hole - Height 76mm
- P712824** Hood - Top Entry Single Lever - with M25 Threaded Hole - Height 65mm
- P718924** Hood - Top Entry Single Lever - with M32 Threaded Hole - Height 76mm
- P71892440 Hood - Top Entry Single Lever - with M40 Threaded Hole - Height 76mm
- P753808 Coupler Hood - Top Entry Single Lever - with M25 Threaded Hole - Height 70.5mm
- P71392440 Coupler Hood - Top Entry Single Lever - with M40 Threaded Hole - Height 81.5mm

## WALL & PANEL HOUSINGS - SINGLE LEVER - IP65



- 714324** Panel Housing - Single Lever - Height 28mm
- P711424MS** Wall Housing with Single M25 Collar - Single Lever - Height 68mm

# PROCON HEAVY DUTY CONNECTORS - B32

## B32 SERIES - 32 POLE & EARTH INSERTS - 500V/16AMP



710116 & 710132

- 710116** Female - 16 Pole & Earth Screw Insert with Wire Guard, 0.5 to 2.5 mm<sup>2</sup>
- 710216** Male - 16 Pole & Earth Screw Insert with Wire Guard, 0.5 to 2.5 mm<sup>2</sup>
- 710132** Female - 16 Pole & Earth Screw Insert with Wire Guard, 0.5-2.5 mm<sup>2</sup> (17-32)
- 710232** Male - 16 Pole & Earth Screw Insert with Wire Guard, 0.5 to 2.5 mm<sup>2</sup> (17-32)
- 710607** Coding Pin

## B32 SERIES - 32 POLE & EARTH CRIMP - 500V/16AMP



710316 & 710332



710511



710500

- 710316** Crimp Contact Carrier for Sleeve Contacts - 16 Pole 500V, 16 Amps, 0.5 to 4 mm<sup>2</sup>
- 710416** Crimp Contact Carrier for Pin Contacts - 16 Pole 500V, 16 Amps, 0.5 to 4 mm<sup>2</sup>
- 710332** Crimp Contact Carrier for Sleeve Contacts - 16 Pole 500V/16A, 0.5 to 4 mm<sup>2</sup> (17-32)
- 710432** Crimp Contact Carrier for Pin Contacts - 16 Pole 500V/16A, 0.5 to 4 mm<sup>2</sup> (17-32)
- 710508** **Crimp Sleeve Contact B Series - 0.14-0.37mm<sup>2</sup>**
- 710504** **Crimp Sleeve Contact B Series - 0.5 mm<sup>2</sup>**
- 710509** **Crimp Sleeve Contact B Series - 0.75mm<sup>2</sup>**
- 710500** **Crimp Sleeve Contact B Series - 1 mm<sup>2</sup>**
- 710501** **Crimp Sleeve Contact B Series - 1.5 mm<sup>2</sup>**
- 710502** **Crimp Sleeve Contact B Series - 2.5 mm<sup>2</sup>**
- 710503** **Crimp Sleeve Contacts B Series - 4.0 mm<sup>2</sup>**
- 710518** **Crimp Pin Contact B Series - 0.14-0.37mm<sup>2</sup>**
- 710514** **Crimp Pin Contact B Series - 0.5 mm<sup>2</sup>**
- 710519** **Crimp Pin Contact B Series - 0.75mm<sup>2</sup>**
- 710510** **Crimp Pin Contact B Series - 1 mm<sup>2</sup>**
- 710511** **Crimp Pin Contact B Series - 1.5 mm<sup>2</sup>**
- 710512** **Crimp Pin Contact B Series - 2.5 mm<sup>2</sup>**
- 710513** **Crimp Pin Contacts B Series - 4.0 mm<sup>2</sup>**
- 700734** Coding Pin suitable for Crimp Contact Carriers

## HOODS & HOUSINGS - DOUBLE LEVER - IP65



- T718132** Hood - Side Entry Double Lever - with M32 Threaded Hole - Height 80mm - IP65
- T718332** Hood - Top Entry Double Lever - with M32 Threaded Hole - Height 80mm - IP65
- 714132** Panel Housing - Double Lever - Height 30mm - IP65

# PROCON HEAVY DUTY CONNECTORS - BA6/BB

## BA6 SERIES - 6 POLE & EARTH - 690V/35AMP



710621

**710620** Female 6 Pole & Earth Screw Terminal Insert plus Wire Guard, 0.5 to 6 mm<sup>2</sup>

**710621** Male 6 Pole & Earth Screw Terminal Insert plus Wire Guard, 0.5 to 6 mm<sup>2</sup>

*Please select Housings from B16 Range*

## BB10 SERIES - 10 POLE & EARTH CRIMP INSERTS 500V/16AMP



**710311** Crimp Contact Carrier for Sleeve Contacts - 10 Pole & Earth

**710411** Crimp Contact Carrier for Pin Contacts - 10 Pole & Earth

*Please select Housings from B6 Range & Crimp Inserts below*

## BB18 SERIES - 18 POLE & EARTH CRIMP INSERTS 500V/16AMP



**710318** Crimp Contact Carrier for Sleeve Contacts - 18 Pole & Earth

**710418** Crimp Contact Carrier for Pin Contacts - 18 Pole & Earth

*Please select Housings from B10 Range & Crimp Inserts below*

## BB32 SERIES - 32 POLE & EARTH CRIMP INSERTS 500V/16AMP



**710333** Crimp Contact Carrier for Sleeve Contacts - 32 Pole & Earth

**710433** Crimp Contact Carrier for Pin Contacts - 32 Pole & Earth

*Please select Housings from B16 Range & Crimp Inserts below*

## BB46 SERIES - 46 POLE & EARTH CRIMP INSERTS 500V/16AMP



**710346** Crimp Contact Carrier for Sleeve Contacts - 46 Pole & Earth

**710446** Crimp Contact Carrier for Pin Contacts - 46 Pole & Earth

*Please select Housings from B24 Range & Crimp Inserts below*

## CRIMP SLEEVES & PINS



710511

**710508** Crimp Sleeve Contact B Series - 0.14-0.37mm<sup>2</sup>

**710504** Crimp Sleeve Contact B Series - 0.5 mm<sup>2</sup>

**710509** Crimp Sleeve Contact B Series - 0.75mm<sup>2</sup>



710500

**710500** Crimp Sleeve Contact B Series - 1 mm<sup>2</sup>

**710501** Crimp Sleeve Contact B Series - 1.5 mm<sup>2</sup>

**710502** Crimp Sleeve Contact B Series - 2.5 mm<sup>2</sup>

**710518** Crimp Pin Contact B Series - 0.14-0.37mm<sup>2</sup>

**710514** Crimp Pin Contact B Series - 0.5 mm<sup>2</sup>

**710519** Crimp Pin Contact B Series - 0.75mm<sup>2</sup>

**710510** Crimp Pin Contact B Series - 1 mm<sup>2</sup>

**710511** Crimp Pin Contact B Series - 1.5 mm<sup>2</sup>

**710512** Crimp Pin Contact B Series - 2.5 mm<sup>2</sup>

# HEAVY DUTY CONNECTORS - D7/D8/D25

## D7/D8 SERIES - 7 POLE & EARTH/8 POLE & EARTH CRIMP INSERTS - 250V/10AMP



720307

**720307** Female 7 Pole Insert for Sleeve Contacts, 0.5 to 2.5 mm<sup>2</sup>



720407

**720407** Male 7 Pole Insert for Sleeve Contacts, 0.5 to 1.5 mm<sup>2</sup>



720308

**720308** Female 8 Pole Insert for Sleeve Contacts, 0.5 to 2.5 mm<sup>2</sup>



720506

**720408** Male 8 Pole Insert for Sleeve Contacts, 0.5 to 1.5 mm<sup>2</sup>

**720506** Sleeve Contacts D Series - 0.14 - 0.37 mm<sup>2</sup>

**720507** Sleeve Contacts D Series - 0.5 mm<sup>2</sup>

**720508** Sleeve Contacts D Series - 0.75 - 1 mm<sup>2</sup>

**720509** Sleeve Contacts D Series - 1.5 mm<sup>2</sup>

**720502** Sleeve Contacts D Series - 2.5 mm<sup>2</sup>

**720516** Pin Contacts D Series - 0.14 - 0.37 mm<sup>2</sup>

**720517** Pin Contacts D Series - 0.5 mm<sup>2</sup>

**720518** Pin Contacts D Series - 0.75 - 1 mm<sup>2</sup>

**720519** Pin Contacts D Series - 1.5 mm<sup>2</sup>

**720512** Pin Contacts D Series - 2.5 mm<sup>2</sup>

Please select Housings from A3 Range

## D25 SERIES - 25 POLE & EARTH CRIMP INSERTS - 250V/10AMP



720325

**720325** Crimp Contact Carrier for Sleeve Contacts (female) - 25 Pole & Earth 0.14-2.5 mm<sup>2</sup>



72050900

**720425** Crimp Contact Carrier for Pin Contacts (male) - 25 Pole & Earth, 0.14 to 2.5 mm<sup>2</sup>

**720506** Sleeve Contacts D Series - 0.14 - 0.37 mm<sup>2</sup>

**720507** Sleeve Contacts D Series - 0.5 mm<sup>2</sup>

**720508** Sleeve Contacts D Series - 0.75 - 1 mm<sup>2</sup>

**720509** Sleeve Contacts D Series - 1.5 mm<sup>2</sup>

**720502** Sleeve Contacts D Series - 2.5 mm<sup>2</sup>

**720516** Pin Contacts D Series - 0.14 - 0.37 mm<sup>2</sup>

**720517** Pin Contacts D Series - 0.5 mm<sup>2</sup>

**720518** Pin Contacts D Series - 0.75 - 1 mm<sup>2</sup>

**720519** Pin Contacts D Series - 1.5 mm<sup>2</sup>

**720512** Pin Contacts D Series - 2.5 mm<sup>2</sup>

Please select Housings from A16 Range

# PROCON HEAVY DUTY CONNECTORS - D40/D64/DD42

## D40 SERIES - 40 POLE & EARTH CRIMP INSERTS - 250V/10AMP



720340

**720340** 40 Pole - Crimp Carrier Sleeve Contacts, 0.14 to 2.5 mm<sup>2</sup>

**720440** 40 Pole - Crimp Carrier Pin Contacts, 0.14 to 2.5 mm<sup>2</sup>

**720506** Sleeve Contacts D Series - 0.14 - 0.37 mm<sup>2</sup>

**720507** Sleeve Contacts D Series - 0.5 mm<sup>2</sup>

**720508** Sleeve Contacts D Series - 0.75 - 1 mm<sup>2</sup>

**720509** Sleeve Contacts D Series - 1.5 mm<sup>2</sup>

**720502** Sleeve Contacts D Series - 2.5 mm<sup>2</sup>

**720516** Pin Contacts D Series - 0.14 - 0.37 mm<sup>2</sup>

**720517** Pin Contacts D Series - 0.5 mm<sup>2</sup>

**720518** Pin Contacts D Series - 0.75 - 1 mm<sup>2</sup>

**720519** Pin Contacts D Series - 1.5 mm<sup>2</sup>

**720512** Pin Contacts D Series - 2.5 mm<sup>2</sup>

*Please select Housings from B16 Range*



720440



720519

## D64 SERIES - 64 POLE & EARTH CRIMP INSERTS - 250V/10AMP



720364

**720364** 64 Pole - Crimp Carrier Sleeve Contacts, 0.14 to 2.5 mm<sup>2</sup>

**720464** 64 Pole - Crimp Carrier Pin Contacts, 0.14 to 2.5 mm<sup>2</sup>

**720506** Sleeve Contacts D Series - 0.14 - 0.37 mm<sup>2</sup>

**720507** Sleeve Contacts D Series - 0.5 mm<sup>2</sup>

**720508** Sleeve Contacts D Series - 0.75 - 1 mm<sup>2</sup>

**720509** Sleeve Contacts D Series - 1.5 mm<sup>2</sup>

**720502** Sleeve Contacts D Series - 2.5 mm<sup>2</sup>

**720516** Pin Contacts D Series - 0.14 - 0.37 mm<sup>2</sup>

**720517** Pin Contacts D Series - 0.5 mm<sup>2</sup>

**720518** Pin Contacts D Series - 0.75 - 1 mm<sup>2</sup>

**720519** Pin Contacts D Series - 1.5 mm<sup>2</sup>

**720512** Pin Contacts D Series - 2.5 mm<sup>2</sup>

*Please select Housings from B24 Range*



720464



720519

## DD42 SERIES - 42 POLE & EARTH CRIMP INSERTS - 250V/10AMP



750142

**750142** 42 Pole - Crimp Carrier Sleeve Contacts, 0.14 to 2.5 mm<sup>2</sup>

**750242** 42 Pole - Crimp Carrier Pin Contacts, 0.14 to 2.5 mm<sup>2</sup>

**720506** Sleeve Contacts D Series - 0.14 - 0.37 mm<sup>2</sup>

**720507** Sleeve Contacts D Series - 0.5 mm<sup>2</sup>

**720508** Sleeve Contacts D Series - 0.75 - 1 mm<sup>2</sup>

**720509** Sleeve Contacts D Series - 1.5 mm<sup>2</sup>

**720516** Pin Contacts D Series - 0.14 - 0.37 mm<sup>2</sup>

**720517** Pin Contacts D Series - 0.5 mm<sup>2</sup>

**720518** Pin Contacts D Series - 0.75 - 1 mm<sup>2</sup>

**720519** Pin Contacts D Series - 1.5 mm<sup>2</sup>

*Please select Housings from B10 Range*



750242





# PROCON HEAVY DUTY CONNECTORS - TOOLS

## TOOLS & ACCESSORIES



710613

**71058220**

**Trumpet Glands with Strain Relief and Bending Protection - M20**

**71058525**

**Trumpet Glands with Strain Relief and Bending Protection - M25**

**71058632**

**Trumpet Glands with Strain Relief and Bending Protection - M32**

**710613**

**Insertion Tool for DD Style Contacts**

**710614**

**Removal Tool for D & DD Style Contacts**

**719619**

**Removal Tool for B & BB Style Contacts**



710601 & 710602

**710601**

**Guiding Pin**

**710602**

**Guiding Sleeve**